



## F21 Transmisor (solo) Velocidad Doble


### Características Esenciales

- 3 Años de Garantía, Servicio y Atención al Cliente en Chile

## Especificaciones Técnicas

<b>Codigo FCC</b>	OFNF21	<b>Potencia del Transmisor</b>	≤10dBm
<b>Fuente de Alimentación del Transmisor</b>	2 AA batteries	<b>Rango de Frecuencia</b>	VHF: 310~331 MHz; UHF: 425 ~ 446 MHz
<b>Material</b>	Glass-Fiber PA	<b>Protección IEC Motor</b>	IP65
<b>Distancia de Control</b>	Approx 60m (100 meters is customized)	<b>Rango de temperatura de Trabajo</b>	-40 ~ 185 °F / -40 ~ 85°C
<b>Código de Seguridad</b>	32 bits (4.3 billion)	<b>Garantía</b>	3 Year

**F21-2S/2D TRANSMITTER**  
Small, economical, convenient

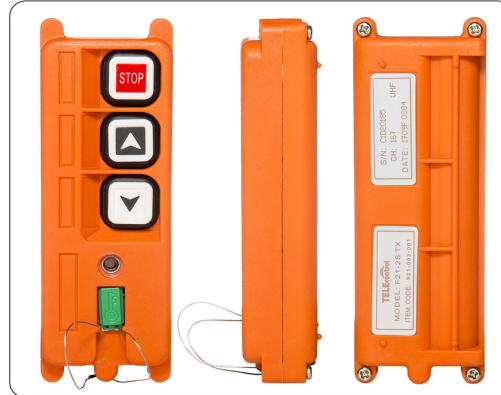

**MODEL: F21-2S-TX**  
**ITEM CODE: 921-002-001**  
**Dimensions: 132 x 45 x 28 mm**  
**Weight: 98g (without batteries)**

- Product Features:**
- Two single/double speed buttons, one "STOP"
  - 6 control contactors.
  - With battery voltage warning device, the power supply is cut off during low power
  - Safety key switch to prevent from unauthorized user.
  - Program the button function by computer interface.
  - Up/Down can be programmed to interlock or non-interlock.
  - The spare button can be programmed to start, toggle or normal, etc.



- Standard Configuration:**
- One transmitter (with hanging belt)
  - One dust bag
  - One receiver
  - Receiver with 1.6 meter cable
  - Battery: One pair
  - One receiver antenna.
  - Operation and maintenance manual.

**Safety features:**  
Each radio remote control system functions in all manner of operational conditions equipped with their own unique identity code (ID-Code). This means that only the correct control unit can activate and control its matching receiver (crane/machine) for maximum safety. The system is FCC and CE certificated.

**Peso & Dimensiones**

<b>Peso Total</b>	1 lbs / 1 Kg
<b>Paquete 1 Peso Neto</b>	1 lbs / 0 Kg
<b>Paquete 1 Ancho</b>	2 in / 5.08 cm
<b>Paquete 1 Peso Bruto</b>	1 lbs / 0 Kg
<b>Paquete 1 Altura</b>	5 in / 12.7 cm
<b>Paquete 1 Profundidad</b>	2 in / 5.08 cm

**Detalles del Empaque**

Referential Images / Imágenes Referenciales  
Specifications may change without notice / las especificaciones pueden cambiar sin previo aviso