




Optidrive P2 VFD 4KW 5HP, 9.5 A, 380~480 V, 3PH with EMC Filter and TFT Display

Input Ratings Supply Voltage 380-480 V Input Phases 3 Supply Current Continuous 11.2 A Supply Fuse or MCB (Type B) 16A A Output Ratings Motor Output Rating 5 kW (5 HP) Output Voltage 0 - Supply Voltage Output Current 9.5 A Cable Information Max Supply Cable Size 8 mm² (0.01 sq in) Max Motor Cable Size 8 mm² (0.01 sq in) Max Motor Cable Length 100 m (328 ft) Factory Build Options EMC Filter Internal EMC Brake Transistor Internal Enclosure IP20 Display TFT Display PCB Coating Standard

Especificaciones Técnicas

| | | | |
|----------------|------------------------------|--|--|
| Voltaje | 3 Phase 380/440~480V 50/60Hz | | |
|----------------|------------------------------|--|--|

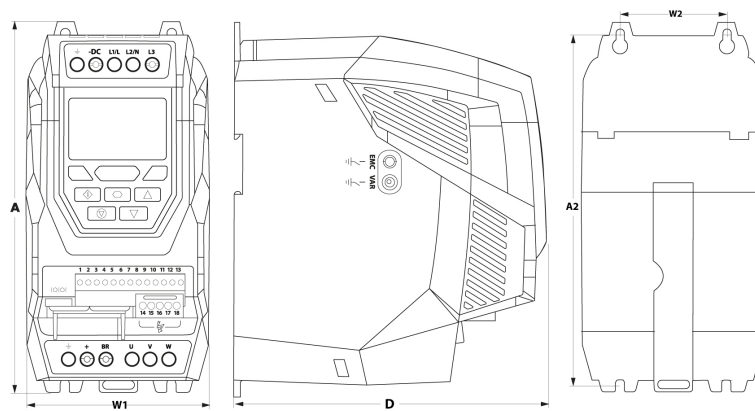

Peso & Dimensiones

Peso Total 4.19 lbs / 2 Kg

Detalles del Empaque

Paquete 1 Peso Neto 3.97 lbs / 2 Kg

Paquete 1 Ancho 5.71 in / 14.5 cm

Paquete 1 Peso Bruto 4.19 lbs / 2 Kg

Paquete 1 Altura 10.43 in / 26.49 cm

Paquete 1 Profundidad 9.06 in / 23.01 cm

Referential Images / Imágenes Referenciales
Specifications may change without notice / las especificaciones pueden cambiar sin previo aviso