




Optidrive P2 VFD 50 HP, 72 A, 380~480 V, 3PH with EMC Filter and TFT D

Input Ratings Supply Voltage 380-480 V Input Phases 3 Supply Current Continuous 76.4 A Supply Fuse or MCB (Type B) 100 A Output Ratings Motor Output Rating 37 kW (50 HP) Output Voltage 0 - Supply Voltage Output Current 72 A Cable Information Max Supply Cable Size 35 mm² (0.05 sq in) Max Motor Cable Size 35 mm² (0.05 sq in) Max Motor Cable Length 100 m (328 ft) Factory Build Options EMC Filter Internal EMC Brake Transistor Internal Enclosure IP20 Display TFT Display PCB Coating Standard

Especificaciones Técnicas

Fases de entrada	3	Corriente de Salida	72 A
Voltaje de Suministro	380 - 480 V	Diametro Maximo de cable de suministro	0.05 sq in
Corriente de Suministro	76.4VDC	Diametro maximo del cable del motor	0.05 sq in
Fusible de suministro o MCB	Type B 100A	Largo maximo del cable del motor	328 ft
Clasificacion de voltaje de salida	37kW		

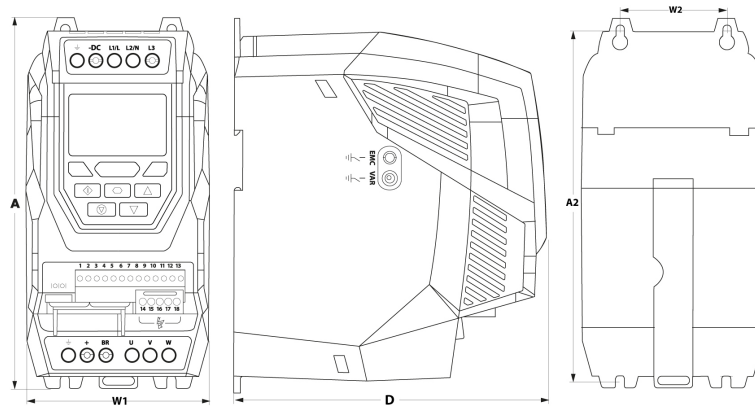

Peso & Dimensiones

Peso Total 45 lbs / 21 Kg

Detalles del Empaque

Paquete 1 Peso Neto 3.97 lbs / 2 Kg

Paquete 1 Ancho 14 in / 35.56 cm

Paquete 1 Peso Bruto 45 lbs / 20 Kg

Paquete 1 Altura 14 in / 35.56 cm

Paquete 1 Profundidad 26 in / 66.04 cm

Referential Images / Imágenes Referenciales
Specifications may change without notice / las especificaciones pueden cambiar sin previo aviso

