




1/2 ton Electric Chain Hoist w/ Power Trolley 1 Speed 380V 50HZ

Características Esenciales

- 3 Años de Garantía, Servicio y Atención al Cliente en Chile

Especificaciones Técnicas

| | | | |
|---|---|--|--|
| Capacidad de Carga | 1/2 ton | Longitud de cadena | 13 |
| Voltaje | 3 Phase 380V 50Hz | Load Chain weight per foot [lbs] | 0.36 |
| Altura de Izaje Estandar (Customizable) | 13 ft / 4 m | Humedad | 20%~90% |
| Velocidad /min | 31.49 ft @60Hz 8 mt @50Hz | Temperatura | -4 ~ 104° F / -20 ~ 40° C |
| Numero de Velocidades | 1 Speed | Tipo Transmisión / Reductor | Spur gearbox |
| Hoist Contactors Amps | 10A | Reducer Lubrication Type | Oil |
| Hoist Contactor Brand | Schneider | Paint Specifications | Electrostatic Sprayed Plastic (ESP) Epoxy resins, Polyester Resins, Barium, Pigments |
| Hoist UL Components | UL Listed Contactors | Normas | ASME HST-1 , ASME B30.16 , EN60204-37 |
| Hoist Contactor Coil Voltage | 48V | Standards Certified | CE |
| Clase de Servicio | H4/M5/2m/Class D | Potencia del Trolley | 500 |
| IEC Hoist IP Protection | IP55 | Cantidad de Velocidades | 1 |
| Protección IEC Motor | IP55 | Velocidad del Trolley /min | 43.30 ft @60Hz 11 mt @50Hz |
| Pendant Control Yes No | Yes | Trolley Motor Brake Type and DC Voltage | DC170V |
| IEC Pendant Control Protection | IP66 | Trolley Motor Insulation Grade | F |
| Pendant Control Emergency Stop | Yes | Trolley Contactors Amps | 20A |
| Pendant Control total Length | 10 ft | Trolley Contactors Brand | Schneider |
| Hoist Motor Power in KW | 0.75 | Trolley Contactors Coil Voltage | 48V |
| Hoist Motor Brake Type and DC Voltage | DC170V | Trolley Wheel Diameter | 95 |
| Hoist Motor Insulation Grade | F | Trolley Wheel Material | No. 45 steel |
| Potencia Total Watts | 1000 | Trolley Minimum Turn Radius | 1.3 |
| Power Cord Length and Phase Order | 3 ft / Red L1, White L2 and Black L3, Green ground | Trolley Beam Range | 3" to 5" |
| Recommended Hoist Protection Circuit Breaker AMPS and Type | Type D 10A | Trolley Beam Extension Kit | up to 12" |
| Optional Load Chain Brand & Country of Origin | FEC Japan | Overload Protection | Overload Motor Clutch |
| Tipo de Cadena | G100 Nikel | Hour Meter | Internal Working Hour Meter |
| Dimensiones de la Cadena | 6.3mm | Brake SKU | PWRX-0.25-0.5-PN.4.11 |
| Caidas de Cadena | 1 | Brake rectifiers-half-wave | PWRX-BKTF-HW |

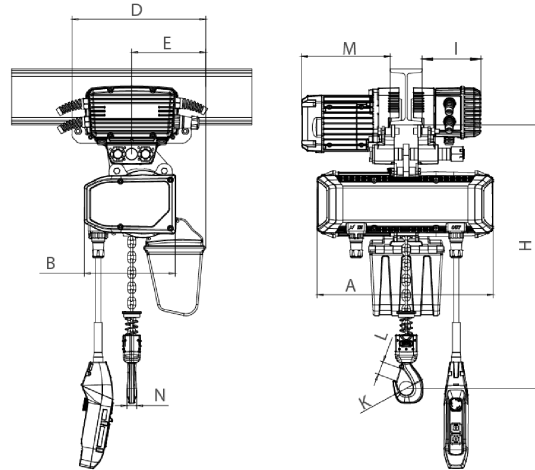

| Rated load (t) | Type | Dimension (mm) | | | | | | | |
|----------------|--------------|---|-----|-----------|-----|-----|----|-----|-----|
| | | Minimum distance from the bottom of the track to the bottom hook: H | A | L | B | D | E | I | M |
| 0.25 | PWRXT0.25-01 | 473 | 440 | 3500-5500 | 285 | 210 | 20 | 105 | 140 |
| 0.5 | PWRXT0.5-01 | 473 | 440 | | 285 | 210 | 20 | 105 | 140 |

Peso & Dimensiones

| | | | |
|--|-------------------|------------------------------|-------------------|
| A Altura Total | 396 | Paquete 1 Altura | 20 in / 50.8 cm |
| J Boca Gancho | 35 | Paquete 2 Altura | 20 in / 50.8 cm |
| W Ancho | 305 | Paquete 1 Ancho | 15 in / 38.1 cm |
| H Altura Muerta | 396 | Paquete 2 Ancho | 13 in / 33.02 cm |
| D Depth | 440 | Paquete 1 Profundidad | 20 in / 50.8 cm |
| 1st Package Type | Wood Crate | Paquete 2 Profundidad | 8 in / 20.32 cm |
| Peso Total (sin cable o cadena) | 56 | Paquete 1 Peso Neto | 61.16 lbs / 28 Kg |
| 2nd Package Type | Wood Crate | Paquete 2 Peso Neto | 62.48 lbs / 28 Kg |
| Peso Total | 145.2 lbs / 66 Kg | Paquete 1 Peso Bruto | 74.8 lbs / 34 Kg |
| | | Paquete 2 Peso Bruto | 70.4 lbs / 32 Kg |

Detalles del Empaque

Referential Images / Imágenes Referenciales
Specifications may change without notice / las especificaciones pueden cambiar sin previo aviso