




7.5 ton Electric Chain Hoist w/ Power Trolley Variable Speed 440~480V 3 ϕ 1/2 50~60HZ

Características Esenciales

- 3 Años de Garantía, Servicio y Atención al Cliente en Chile

Especificaciones Técnicas

Capacidad de Carga	7.5 ton	Longitud de cadena	90
Voltaje	3 Phase 440~480V 60Hz	Load Chain weight per foot [lbs]	1.83
Altura de Izaje Estandard (Customizable)	30 ft / 9 m	Humedad	20%~90%
Velocidad /min	1.1~7 ft @60Hz mt @50Hz	Temperatura	-4 ~ 104° F / -20 ~ 40° C
Numero de Velocidades	Variable Speed	Tipo Transmisión / Reductor	Spur gearbox
Hoist VFD Power	4kW	Reducer Lubrication Type	Oil
Hoist VFD Brand	HUAYUAN	Paint Specifications	Electrostatic Sprayed Plastic (ESP) Epoxy resins, Polyester Resins, Barium, Pigments
VFD Model	Z230	Normas	ASME HST-1 , ASME B30.16 , B30.17 , EN60204-37
Brake Resistor Kw	1Kw	Standards Certified	CE
Clase de Servicio	H4/M5/2m/Class D	Potencia del Trolley	750
IEC Hoist IP Protection	IP55	Cantidad de Velocidades	Variable
Protección IEC Motor	IP55	Velocidad del Trolley /min	5.9~47.23 ft @60Hz 1.5~12 mt @50Hz
Pendant Control Yes No	Yes	Trolley Motor Brake Type and DC Voltage	DC207V
IEC Pendant Control Protection	IP66	Trolley Motor Insulation Grade	F
Pendant Control Emergency Stop	Yes	Trolley VFD Power in KW	2.5KW
Pendant Control total Length	27 ft	Trolley VFD Brand	Huayuan
Hoist Motor Power in KW	3	Trolley VFD Model	Z230
Hoist Motor Brake Type and DC Voltage	DC207V	Trolley Wheel Diameter	139
Hoist Motor Insulation Grade	F	Trolley Wheel Material	No. 45 steel
Potencia Total Watts	4000	Trolley Minimum Turn Radius	1.8
Power Cord Length and Phase Order	3 ft / Black L1 , Red L2 and Blue L3]Green ground	Trolley Beam Range	3.9" to 7"
Recommended Hoist Protection Circuit Breaker AMPs and Type	Type D 20A	Trolley Beam Extension Kit	up to 12"
Optional Load Chain Brand & Country of Origin	FEC Japan	Overload Protection	Overload Motor Clutch
Tipo de Cadena	G100 Nikel	Hour Meter	Internal Working Hour Meter
Dimensiones de la Cadena	11.2 mm	Brake SKU	PWRX-2-20-PN.60.61
Caidas de Cadena	3	Brake rectifiers-half-wave	PWRX-BKTF-HW

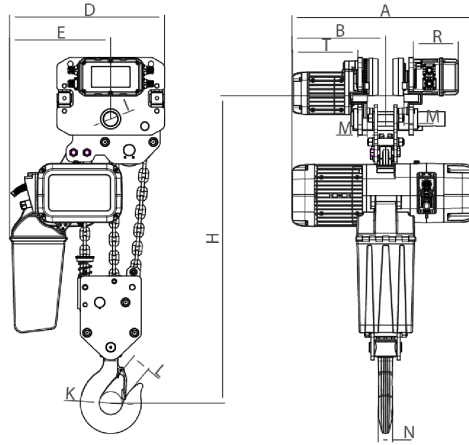

Rated load (t)	Type	Dimension (mm)													
		Minimum distance from the bottom of the track to the bottom hook: H	A	L	B	D	E	I	M	N	K	L	T	R	
7	PWRXT7-03	1020	681	3500-5500	350	579	375	54	35	48	85	80	242	167	

Peso & Dimensiones

Detalles del Empaque

A Altura Total	1020	Paquete 1 Altura	31 in / 78.74 cm
J Boca Gancho	85	Paquete 2 Altura	23 in / 58.42 cm
W Ancho	576	Paquete 1 Ancho	20 in / 50.8 cm
H Altura Muerta	1170	Paquete 2 Ancho	14 in / 35.56 cm
D Depth	681	Paquete 1 Profundidad	30 in / 76.2 cm
1st Package Type	Wood Crate	Paquete 2 Profundidad	11 in / 27.94 cm
Peso Total (sin cable o cadena)	130	Paquete 1 Peso Neto	294.8 lbs / 134 Kg
2nd Package Type	Wood Crate	Paquete 2 Peso Neto	345.4 lbs / 157 Kg
Peso Total	869 lbs / 395 Kg	Paquete 1 Peso Bruto	495 lbs / 225 Kg
		Paquete 2 Peso Bruto	374 lbs / 170 Kg

Referential Images / Imágenes Referenciales
Specifications may change without notice / las especificaciones pueden cambiar sin previo aviso